


## Réduction Geberit PE concentrique, courte

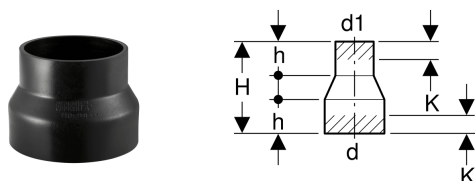

### Utilisation

- Pour l'évacuation des bâtiments
- Pour l'évacuation des eaux de ruissellement

### Caractéristiques

- Résistant aux UV

### Caractéristiques techniques

Matériau | PE-HD

N° de réf.	DN	d, ø	d1, ø	H	h	K
361.559.16.1	50 / 40	50 mm	40 mm	8 cm	3 cm	1.5 cm
363.559.16.1	56 / 40	56 mm	40 mm	8 cm	3 cm	1.5 cm
363.560.16.1	56 / 50	56 mm	50 mm	8 cm	3 cm	1.5 cm
364.559.16.1	60 / 40	63 mm	40 mm	8 cm	3 cm	1.5 cm
364.560.16.1	60 / 50	63 mm	50 mm	8 cm	3 cm	1.5 cm
364.565.16.1	60 / 56	63 mm	56 mm	8 cm	3 cm	1.5 cm
365.559.16.1	70 / 40	75 mm	40 mm	8 cm	3 cm	1.5 cm
365.560.16.1	70 / 50	75 mm	50 mm	8 cm	3 cm	1.5 cm
365.565.16.1	70 / 56	75 mm	56 mm	8 cm	3 cm	1.5 cm
365.570.16.1	70 / 60	75 mm	63 mm	8 cm	3 cm	1.5 cm
366.559.16.1	90 / 40	90 mm	40 mm	8 cm	3 cm	1.5 cm
366.560.16.1	90 / 50	90 mm	50 mm	8 cm	3 cm	1.5 cm
366.565.16.1	90 / 56	90 mm	56 mm	8 cm	3 cm	1.5 cm
366.570.16.1	90 / 60	90 mm	63 mm	8 cm	3 cm	1.5 cm
366.575.16.1	90 / 70	90 mm	75 mm	8 cm	3 cm	1.5 cm
367.559.16.1	100 / 40	110 mm	40 mm	8 cm	3 cm	1.5 cm
367.560.16.1	100 / 50	110 mm	50 mm	8 cm	3 cm	1.5 cm
367.565.16.1	100 / 56	110 mm	56 mm	8 cm	3 cm	1.5 cm
367.570.16.1	100 / 60	110 mm	63 mm	8 cm	3 cm	1.5 cm
367.575.16.1	100 / 70	110 mm	75 mm	8 cm	3 cm	1.5 cm
367.580.16.1	100 / 90	110 mm	90 mm	8 cm	3 cm	1.5 cm
368.570.16.1	125 / 60	125 mm	63 mm	8 cm	3 cm	1.5 cm
368.575.16.1	125 / 70	125 mm	75 mm	8 cm	3 cm	1.5 cm
368.580.16.1	125 / 90	125 mm	90 mm	8 cm	3 cm	1.5 cm
368.585.16.1	125 / 100	125 mm	110 mm	8 cm	3 cm	1.5 cm
369.535.16.1	150 / 100	160 mm	110 mm	4 cm	0.6 cm	0 cm